




CRYSTAL SYSTEM

KEYSTONE JACK.....18
FACEPLATE.....19
SURFACE BOX.....19
MODULAR PLUG.....20
PATCH CORD.....21
PATCH PANEL.....21



SPECIFICATION


- Keystone Jacks exceed the requirements of Category 5e specified in TIA/EIA-568-B.2.
- Pin assignment meet T568A and T568B wiring.
- Modular Jacks meet F.C.C. Part 68.
- Plugs insertion life: 750 cycles Min.
- 50 Micro inches of gold plating on spring contacts.
- Accept punchdown tools (AT&T or KRONE Types) for insulation of wires (AWG 24~26).
- Housing: high impact 94V-0 rated.
- UL Certified.
- Pxx
 └─ Color (Transparent)

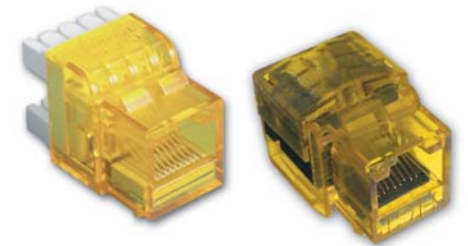

KEYSTONE JACK

ORDERING INFORMATION


Part No.	Description
3013A-ZH8-C6ABL-PXX	180° Cat.6 Keystone Jack. RJ45 (8P8C) T568A/T568B.
3013A-PH8-C6ABL-PXX	90° Cat.6 Keystone Jack. RJ45 (8P8C) T568A/T568B.

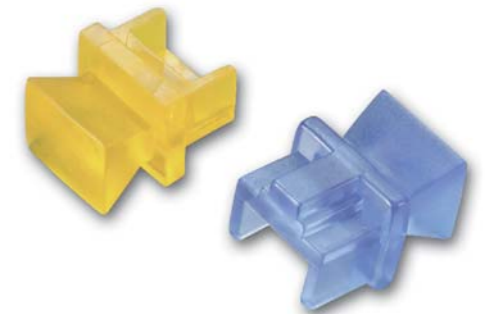

DUST COVER Material:PVC

ORDERING INFORMATION

Part No.	Description
PDC-A8-PXX	Use for RJ45 Sockets. Fingermovable.

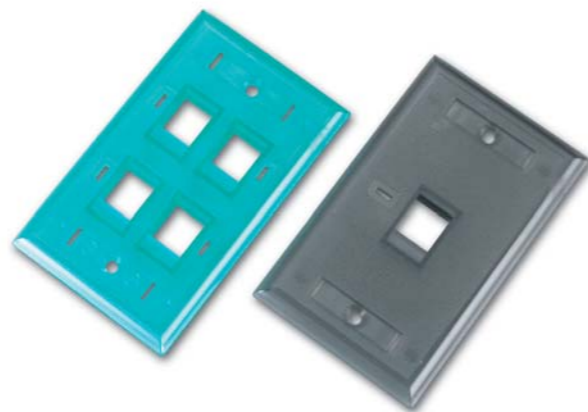

FACEPLATE

ORDERING INFORMATION

Part No.	Description
2013A-N1-PXX	1-port Single Gang Faceplate W/Station ID & Color Icon.
2013A-N2-PXX	2-port Single Gang Faceplate W/Station ID & Color Icon.


Dimension: L113 x W70 (mm)



SURFACE MOUNT BOX

ORDERING INFORMATION

Part No.	Description	Dimension
SMB-1-PXX	1-port Surface Box.	L65.3 x W42.6 x H32.2 (mm)
SMB-2-PXX	2-port Surface Box.	L65.3 x W54.7 x H32.2 (mm)

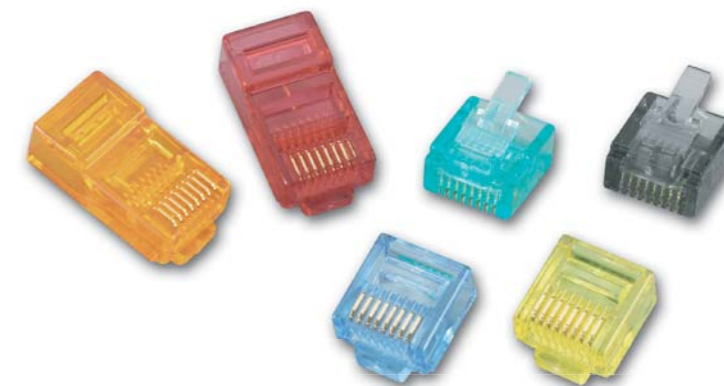

MODULAR PLUG

ORDERING INFORMATION

The 3-prong of contact blade is designed for both stranded and solid wire (24-26 AWG). It gets very low contact resistance while assembling.

Part No.	Description
88-CR-PXX	8P8C for Round cable, unshielded Stranded & Solid wire used.
88-BRS-PXX	8P8C for Round cable, unshielded Solid wire used. (Short body)

BOOT Material:PVC

ORDERING INFORMATION

The Plug Cover (Boot) is designed to protect RJ45 modular plugs. It can be used for 6.0mm round cable.


Part No.	Description
SR-60-PXX	Strain Relief for RJ45 Plugs.



PATCH CORD

ORDERING INFORMATION

Part No.	Length	Description
UTP801-A-PXX-C5eA/B	1m	UTP 4-pair Stranded Wire.
UTP802-A-PXX-C5eA/B	2m	Unshielded plugs W/assembled boots on both ends.
UTP803-A-PXX-C5eA/B	3m	RJ45 (8P8C) T568A/T568B.
UTP805-A-PXX-C5eA/B	5m	

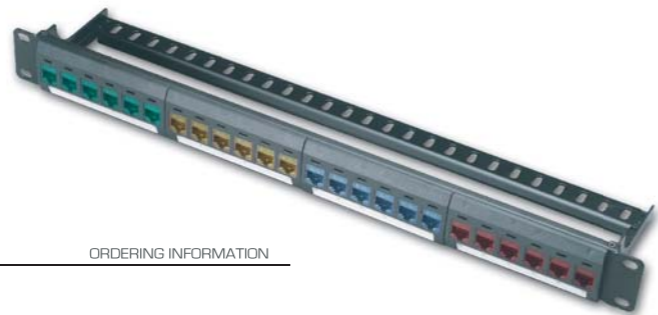

PATCH PANEL

ORDERING INFORMATION

Part No.	Port	Description
SP24D-ZH8-C5eA/B-PXX	24	W/HCSIP-D06 HC3013A-ZH8 Unshielded Keystone Jacks. RJ45 (8P8C) T568A/T568B. Dimension: 1.75" x 1.9" (mm)